

12GHz RF over Fiber Mini-Q High SFDR



Key Features:

- Frequency Range: 0.1-12GHz
- Low spurious level
- High SFDR 113 dB/Hz
- Excellent phase linearity
- Excellent Phase Noise

Configurations:

- Standard (stand-alone)
- 1U Generic enclosure (4 units)
- 1U Removable panel enclosure (2/4 units)
- Outdoor (2/4 units)

Applications:

- Distributed Antenna
- Satcom
- Radio telescopes
- Telecommunication:
 - Antenna Remoting
 - Long RF links via fiber
- EW

Options:

- Customized RF Gain, P1dB, Noise Figure by adding internal Pre & Post amplifier(s)
- Extended low-frequency bandwidth

RFOptic's analog RFoF compact modules enable long distance transport of wideband RF signals. The Tx unit, using an optical transmitter, converts wideband RF signals to an Optical signal and the Rx unit converts the Optical signal back to the RF signal. The two units are connected by the customer's fiber.

In general, a wide range of spurious-free dynamic range (SFDR) is desirable when multiple signals of very different power levels are expected. High SFDR transmission RFoF simplifies signal conditioning requirements intended to avoid signal saturation and subsequent consequences such as power level adjustment. During e.g., antenna testing, radar or communications system testing, high SFDR is essential due to the typical large amplitude ratios between main and side lobes or close and distant targets. The same applies to DF/ELINT systems which have to handle strong jammers concurrent with weak signals of interest.

RFOptic's 12, 18, 20, 30, and 40 GHz RFoF solutions provide high SFDR of minimum 113 dB/Hz. Due to their improved NF, an additional pre-amplifier may not be needed. These high-performance products are used in applications such as civil communication, antenna remoting, telemetry, defense systems, satellite communications, and more.

When looking for a high SFDR solution, our L (Low Noise) solutions are the preferred option compared to our Q (standard) solutions.

RFoF-12GHz-Q0-Mini High SFDR Specifications

RF Parameter Tx-Rx Link	Unit	Specification (typical)
Frequency Range ^[1]	GHz	0.1-12
RF Gain ^[2,3]	dB	-23
Gain Flatness for the entire frequency range ^[4]	dB	±1.6
1dB Input gain compression point ^[3]	dBm	18
Noise Figure ^[2,3]	dB	32
SFDR (calculated) ^[3,5]	dB/Hz ^{2/3}	113
Maximum RF input level (No damage)	dBm	20
VSWR Input	-	2:1
VSWR Output	-	2:1
Spurious ^[6]	dBc	≤-90
Phase Noise at 10KHz Offset	dBc/Hz	≤-130
Input / Output impedance	Ohm	50
Optical and Electrical and Environmental (Tx, Rx)		
Laser diode optical wavelength	μm	1.55
Receiver photodiode optical wavelength	μm	1.5-1.58
Operating temperature range	-	0 to +70
Storage temperature	°C	-40 to +85
LED status indicators (Tx/Rx)	°C	Blue/Green/Red
Input voltage ^[7]	-	5
Power consumption Tx module ^[8]	VDC	2
Power consumption Rx module ^[8]	Watt	0.25
Mechanical (Tx/Rx)		
Dimensions Tx/Rx unit	mm	75*154*33
Weight Tx/Rx unit	grams	450
RF Input / Output connectors	-	SMA
Optical Connector	-	FC/APC
Power connector and Data/monitor connector ^[9]	-	DB15

[1] Extended low frequency 0.02-12 GHz is optional.

[2] Excluding customer fiber loss.

[3] Measured at 10GHz. Typical values of Gain, P1dB and NF with Pre/Post Amps are indicated in the table below.

[4] Each of the pre/post amplifiers (optional) add about ±1.2dB to the gain flatness.

[5] SFDR (calculated) $\approx 2/3x[(IP1dB+10)+174-NF]$ dB/Hz^{2/3}; Excluding in-band harmonics.

[6] Measured with input signal at Ip1dBc - 3dB at 1GHz. For HSFDR link with 28dB post amplifier the spurious level is about -85dBc.

[7] Recommended Power Supplies: Meanwell P/N GSM25U05-P1J (USA); GSM25E05-P1J (Europe); GE40I05-P1J (all purpose).

[8] Each of the pre/post amplifiers (optional) add about 1.8W to the module power consumption.

[9] For USB monitor, download the software here: <https://rfoptic.com/software-download-rfof/>

RFoF 12GHz Module Options

Parameter	Unit	HSFDR 12GHz Transceiver	HSFDR 12GHz Transceiver with Pre-Amp	HSFDR 12GHz Transceiver with Post-Amp	HSFDR 12GHz Transceiver with Pre- and Post-Amp
P/N	-	RFoF-12GHz-Q0-Mini	RFoF-12GHz-Q1-Mini	RFoF-12GHz-Q0-Mini-P	RFoF-12GHz-Q2-Mini
Gain*	dB	-23	-7	9	9
Input P1dB*	dBm	18	2	14	2
Noise Figure*	dB	32	16	33	18
SFDR*	dBc/Hz	113	113	110	112


* Measured at 10GHz, for HSFDR units integrated in Indoor or Outdoor enclosures: NF and P1dB values will increase in ~2dB and Gain will decrease in ~2dB.

HSFDR RFoF 12GHz, October 2025




Tel. Int.:+972-76-540 0180 • Tel. USA: +1 708 RFOPTIC, 21 Yeg'ia Kapayim, Building C, 3rd Floor 4913020 Petah Tikva, Israel

www.rfoptic.com

RFoF 12GHz – Simplified Block Diagram

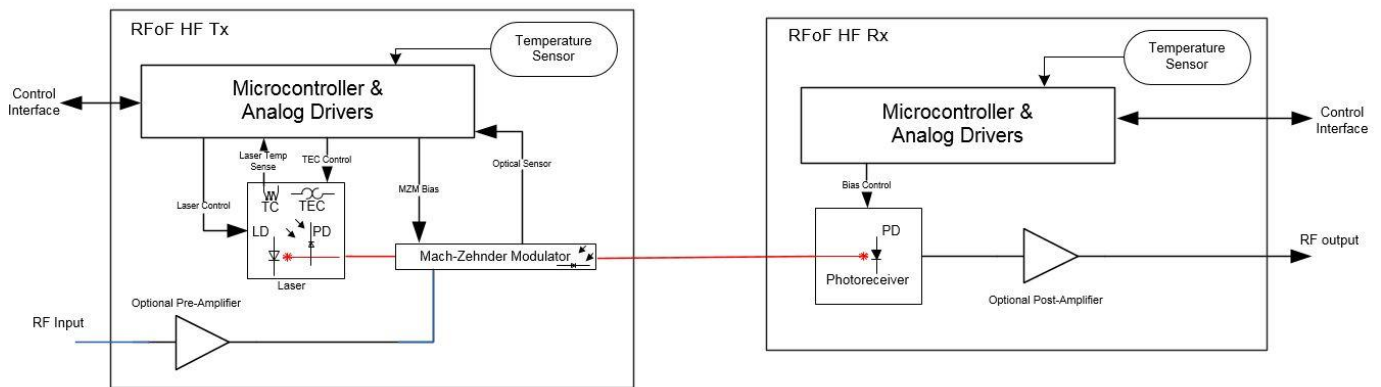

RFoF 12GHz – Typical Test Results

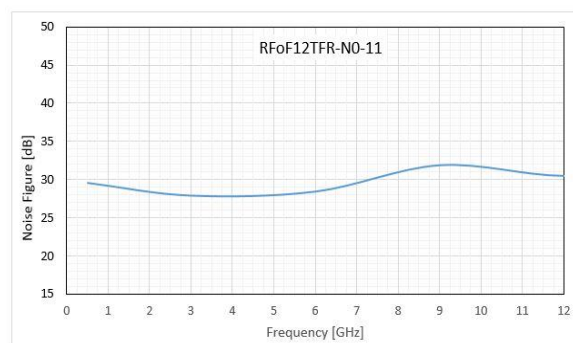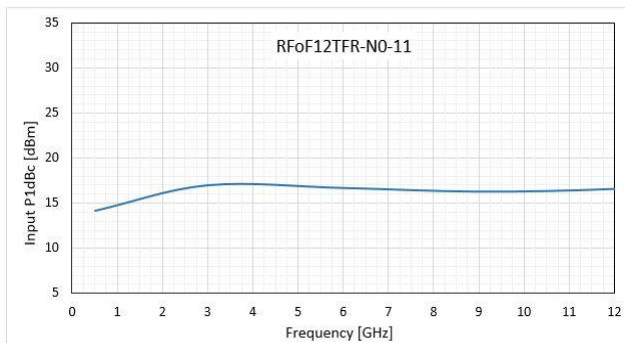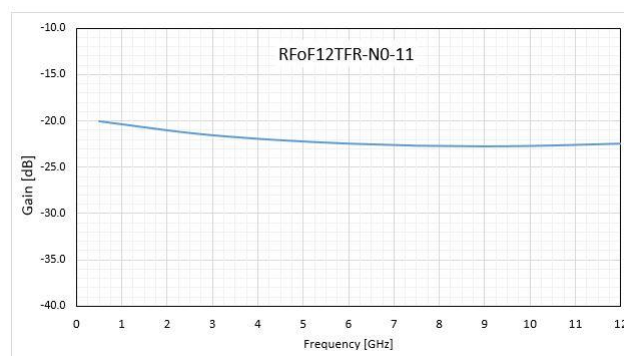

RFoF Enclosure Options

Parameter	19" 1U Enclosure for RFoF	Outdoor Enclosure for RFoF
Dimensions (mm)	19" 1U Generic: 445(W)* 476(L)*44(H) 19" 1U Removable: 442(W)* 402(L)*44(H)	Small Outdoor: 270(W)*230(L)*85(H) Large Outdoor: 330(W)*350(L)*85(H)
RF Input / Output Connector	SMA female	N Type female
Optical Connector	FC/APC or SC/APC	MPO/APC 4/8 male ^[1]
Data Connector	USB2/RJ-45	RJ45 female ^[2]
Power Connector	HP Socket	DC female/ AC male ^[2,3]
Power	110/220 VAC	9-36DC / 110/220VAC ^[2,3]


[1] MPO (F) 4/8 optical cable should be ordered according to the required length and conditions.

[2] IP-54 Data, AC and DC opposite connectors are provided as accessories with the module (cables are not included).


[3] DC and AC versions of the outdoor enclosure are available.

Mechanical Outline Drawing - 12GHz RFoF Tx and Rx modules

Tx module

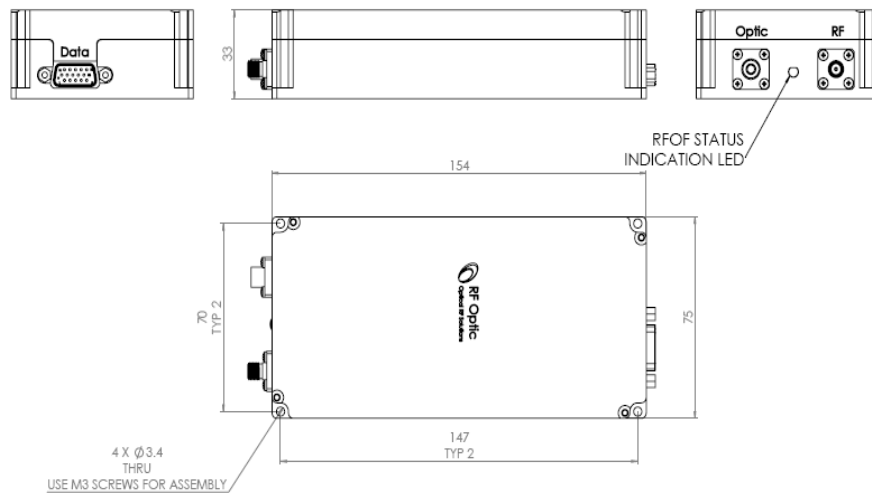

Rx module

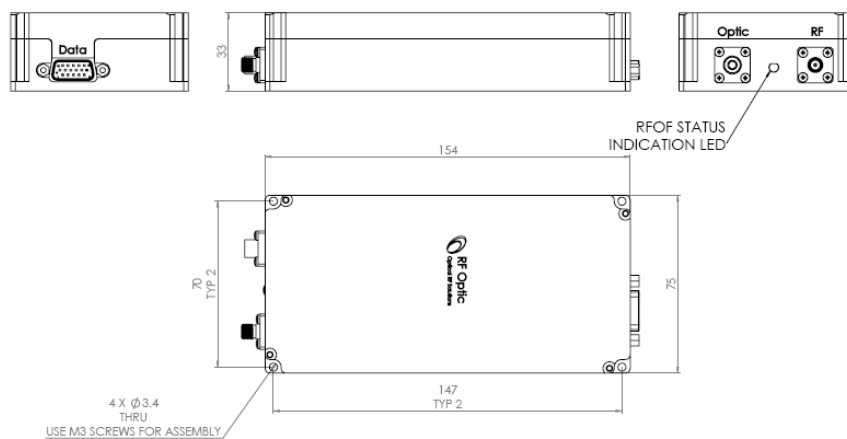

Ordering Information

P/N	Description	Tx	Rx
RFoF-12G-Q0-Mini	Transceiver 12GHz, HSFDR	RFoF12TFR-N0-11	RFoF12RFR-N0-11
RFoF-12G-Q1-Mini	Transceiver 12GHz, HSFDR with Pre-Amp	RFoF12TFR-A0-11	RFoF12RFR-N0-11
RFoF-12G-Q0-Mini-P	Transceiver 12GHz, HSFDR, with Post-Amp	RFoF12TFR-N0-11	RFoF12RFR-A1-11
RFoF-12G-Q2-Mini	Transceiver 12GHz, HSFDR, with Pre and Post-Amp	RFoF12TFR-A0-11	RFoF12RFR-A0-11
HSFDR-Cable-Data-DC ^[1]	2 X D15 to USB 150cm & D15 to DC 25cm special cable	For stand-alone HSFDR link	
Outdoor Data & AC set ^[2]	Data and 110/220 AC opposite connectors – accessories	For outdoor enclosure with AC supply	
Outdoor Data & DC set ^[2]	Data and 5VDC opposite connectors – accessories	For outdoor enclosure with DC supply	

[1] Cable supplied with the RFoF-12G-L0-Mini link.

[2] Connectors supplied with the RFoF-12G-L0-Mini link/s in Outdoor enclosure.