

## 12GHz RF over Fiber Mini High SFDR



### Key Features:

- Frequency Range: Up to 12GHz
- Low spurious level
- High SFDR 113 dB/Hz
- Excellent Phase Noise
- Excellent phase linearity

### Configurations:

- Standard (stand-alone)
- 1U Generic enclosure (4 units)
- 1U Removable panel enclosure (2/4 units)
- Outdoor (2/4 units)

### Applications:

- Distributed Antenna
- Satcom
- Radio telescopes
- Telecommunication:
  - Antenna Remoting
  - Long RF links via fiber
- EW

### Options:

- Extended Frequency range
- Customized RF Gain, P1dB, Noise Figure by adding Pre & Post amplifier(s)
- Extended low frequency bandwidth.

**RFOptic's** analog RToF compact modules enable long distance transport of wideband RF signals. The Tx unit, uses an optical transmitter, converts wideband RF signals to an Optical signal and the Rx unit converts the Optical signal back to RF signal. The two units are connected by the customer's fiber.

In general, a wide range of spurious-free dynamic range (SFDR) is desirable when multiple signals of very different power levels are expected. High SFDR transmission RToF simplifies signal conditioning requirements intended to avoid signal saturation and subsequent consequences such as power level adjustment, and ALC and power range switching by attenuators. During e.g., antenna testing, radar or communications system testing, high SFDR is essential due to the typical large amplitude ratios between main and side lobes or close and distant targets. The same applies to DF/ELINT systems which have to handle strong jammers concurrent with weak signals of interest.

RFOptic's high SFDR 12, 18, 20, 30 and 40 GHz RToF solutions provide high SFDR of minimum 112 dB/Hz. Due to their improved NF, an additional preamplifier may not be needed anymore. Among the current customers that are using our RToF high frequency product line are civil and defense systems integrators, space program companies, communications companies and more.

### RFoF-12GHz-Q0-Mini High SFDR specifications:

RF Parameter RF TX-Rx Link	Unit	Specification typical
Frequency Range <sup>[1]</sup>	GHz	0.1-12
RF Gain <sup>[2,3]</sup> at 10 GHz	dB	-23
Gain Flatness	dB	≤ ±1.5
1dB Input compression point <sup>[3]</sup>	dBm	18
Noise Figure <sup>[2,3]</sup>	dB	32
SFDR (calculated) <sup>[3,4]</sup>	dB/Hz <sup>2/3</sup>	113
Maximum RF input level	dB	23
VSWR Input	-	2:1
VSWR Output	-	2:1
Spurious	dBc	≤-80
Phase Noise at 10KHz offset	dBc/Hz	≤-100
Input / Output impedance	Ohm	50
<b>Optical and Electrical and Environmental (Tx, Rx)</b>		
Laser diode optical wavelength	μm	1.55
Receiver photodiode optical wavelength	μm	1.50-1.58
Operating temperature range	°C	0 to +70
Storage temperature	°C	-40 to +85
LED status indicators (Tx/Rx)	-	Green/Red
Input voltage	VDC	5
Power consumption Tx module	Watt	2.5
Power consumption Rx module	Watt	0.5
<b>Mechanical (Tx/Rx)</b>		
Dimensions Tx/Rx unit	mm	75*155*33
RF Input / Output connectors	mm	SMA
Optical Connector	-	FC/APC
Power connector and Data connector	-	DB15

[1] Extended low frequency bandwidth upon request

[2] Excluding customer fiber loss.

[3] Measured at 10 GHz.

[4] Calculated. Excluding in-band harmonics. SFDR=2/3(IP3+174-NF) dB/Hz<sup>2/3</sup>.


### RFoF 12GHz module options:

Parameter	P/N Unit	RFoF 12GHz High SFDR	RFoF 12GHz High SFDR w/ 17dB Pre Amp.	Amplifier RFoF 12GHz High SFDR w/17dB Post Amp & Pre Amp.	RFoF 12GHz High SFDR w/ 30dB Post Amplifier
P/N	-	RFoF-12GHz-Q0-Mini	RFoF-12GHz-Q1-Mini	RFoF-12GHz-Q2-Mini	RFoF-12GHz-Q0-Mini-P
Gain	dB	-22	-5	12	7
InP1dB	dB	18	1	1	18
Noise Figure	dB	32	16	16	32
SFDR	dBc/Hz	113	113	113	113


\* Standard Frequency range with pre/post amplifiers is 1-12GHz

## Mechanical Outline Drawing: 12GHz RFoF Tx & Rx units

### Tx unit

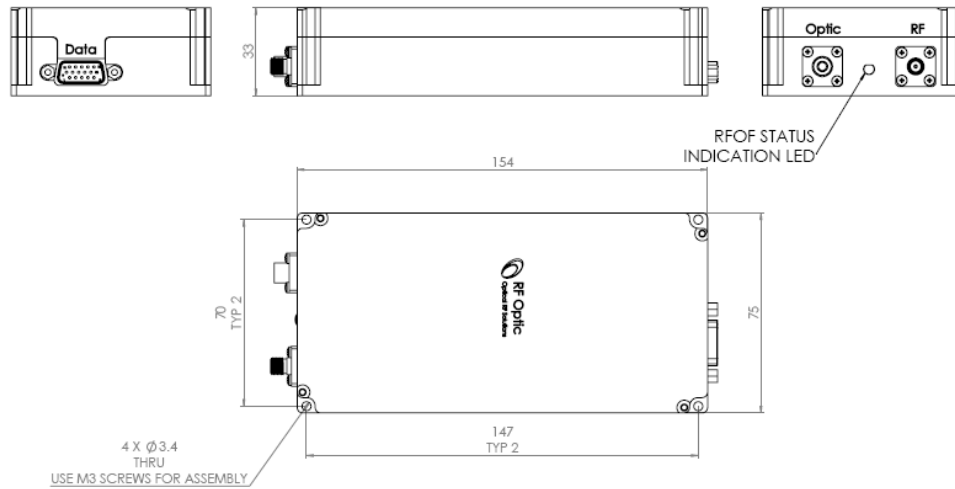

### Rx unit

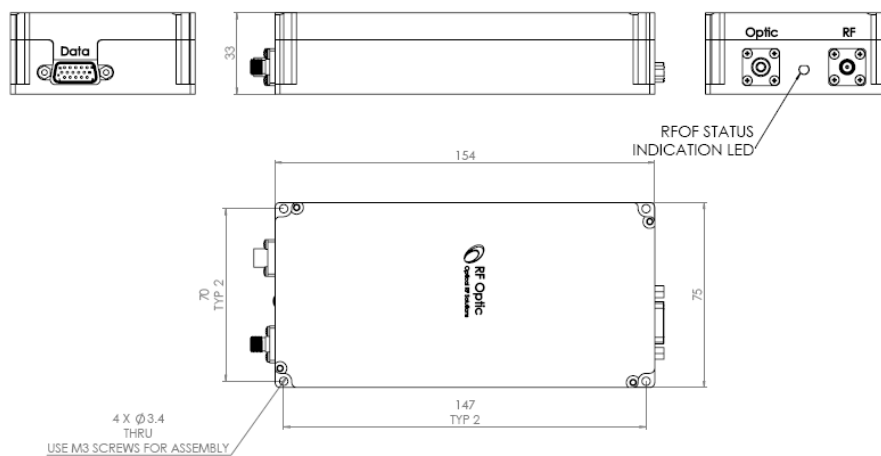

## Ordering Information

<b>RFoF-12G-Q0-Mini</b>	Transceiver 12GHz, Tx/Rx 154X74X33 mm
<b>RFoF-12G-Q1-Mini</b>	Transceiver 12GHz, Tx/Rx 154X74X33 mm, with 17dB Pre-Amp.
<b>RFoF-12G-Q2-Mini</b>	Transceiver 12GHz, Tx/Rx 154X74X33 mm, with 17dB Pre-Amp. & 17 dB Post-Amp.
<b>RFoF-12G-Q0-Mini-P</b>	Transceiver 12GHz, Tx/Rx 154X74X33 mm, with 7dB Gain, 30dB Post-Amp.